

TECHNICAL DATA

Features

- Fast response time
- Compatible with Type-K temperature measuring instruments

Model R2920 Surface Thermocouple Probe

- Measurement range: -58 to 932°F (-50 to 500°C)
- For general purpose temperature applications
- Dimensions: Probe: 6.3" (160mm) Handle: 5" (125mm) Wire: 39" (100cm)

Model R2930 Right Angle Thermocouple Surface Probe

- Measurement range: -58 to 932°F (-50 to 500°C)
- Dimensions: Probe: 7.9" (200mm) Handle: 5" (127mm) Wire: 39" (100cm)

Model R2940 Air/Gas Thermocouple Probe

- Measurement range: -58 to 1652°F (-50 to 800°C)
- Perforated stainless steel shield permits fast response and element protection
- Dimensions: Probe: 6.1" (156mm), Handle: 5.2" (131mm), Wire: 39" (100cm)

Model R2950 Immersion Thermocouple Probe

- Measurement range: -58 to 1112°F (-50 to 600°C)
- For immersion and general purpose applications
- Dimensions: Probe: 6.1" (156mm) Handle: 5" (127mm) Wire: 39" (100cm)

Model R2960 Needle Tip Thermocouple Probe

- Measurement range: -58 to 1112°F (-50 to 600°C)
- Designed for food, gels and liquids
- Dimensions: Probe: 7.1" (180mm) Handle: 5" (127mm) Wire: 39" (100cm)



R2920



R2930



R2940




R2950




R2960

Continued...

TECHNICAL DATA

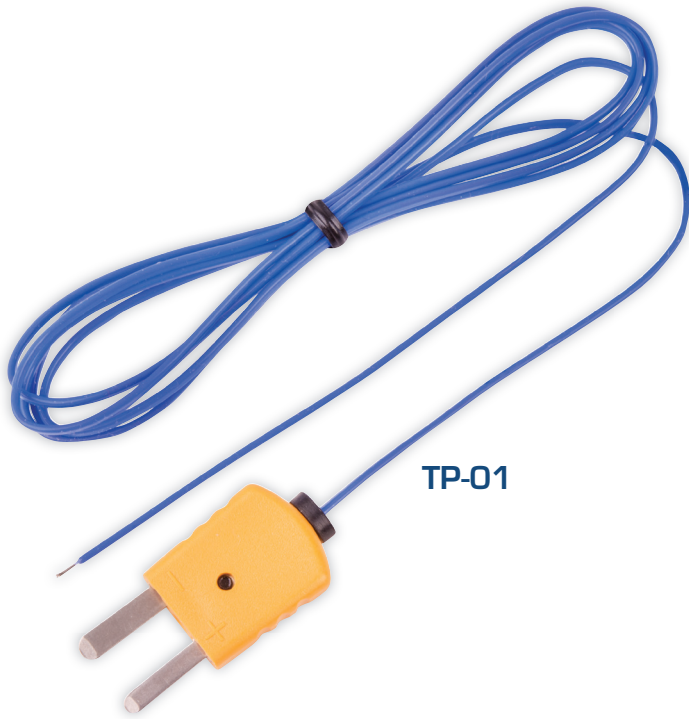

TP-01

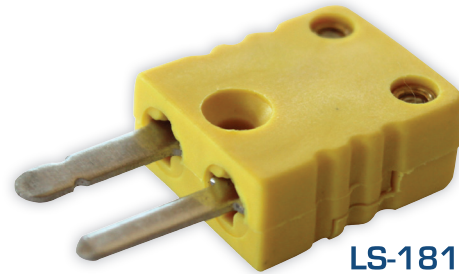

LS-181



LS-182

Model TP-01 Beaded Thermocouple Wire Probe

- Measurement range: -40 to 482°F (-40 to 250°C)
- For general purpose temperature applications
- Dimensions: Wire: 38" (96.5cm)

Model LS-181 Male Thermocouple Connector

- This type-k male thermocouple connector is constructed of glass-filled nylon for increased strength and wear resistance. The LS-181 is rated up 425°F (250°C) and is color coded according to ANSI thermocouple identification standards.

Model LS-182 Female Thermocouple Connector

- This type-k female thermocouple connector is constructed of glass-filled nylon for increased strength and wear resistance. The LS-182 is rated up 425°F (250°C) and is color coded according to ANSI thermocouple identification standards.

Model	Description
R2920	Surface Thermocouple Probe
R2920-NIST	Surface Thermocouple Probe & NIST
R2930	Right Angle Thermocouple Surface Probe
R2930-NIST	Right Angle Thermocouple Surface Probe & NIST
R2940	Air/Gas Thermocouple Probe
R2940-NIST	Air/Gas Thermocouple Probe & NIST
R2950	Immersion Thermocouple Probe
R2950-NIST	Immersion Thermocouple Probe & NIST
R2960	Needle Tip Thermocouple Probe
R2960-NIST	Needle Tip Thermocouple Probe & NIST
TP-01	Beaded Thermocouple Wire Probe
TP-01-NIST	Beaded Thermocouple Wire Probe & NIST
LS-181	Male Thermocouple Connector
LS-182	Female Thermocouple Connector